CM608D

6.5" two-way, thin edge ceiling loudspeaker, white

The CM608D 6.5” two-way built-in low impedance loudspeaker is very suitable for the distribution of background music. It provides a warm background sound and can be used with a standard hi-fi amplifier.

This loudspeaker is easy to install, due to its handy Quick Fit connector, an in and out push terminal for loudspeaker wire connection up to 2.5 mm. The RAL paintable thin edge grille makes it easy to integrate high quality background sound with any interior. The CMD608D is the design version of our reference install built-in loudspeaker the CM608.

TECHNICAL SPECIFICATIONS

outside diameter in mm	210	**depth in mm**	75
cutout in mm	186	**installation grip range in mm**	2 - 25
loudspeaker system	2-way	**woofer size in inch**	6.5
woofer cone material	polypropylene	**tweeter size in inch**	1
mounting system	3 screws	**colour**	white
impedance in ohms	8	**low impedance dynamic power in watts**	60
low impedance RMS power in watts	40	**SPL 1W/1m in dB**	92
max SPL 1m in dB	104	**frequency response in Hz**	60 - 20K
main construction material	ABS plastic	**grille main material**	steel
IP rating	50	**applicable low impedance**	yes
applicable in 100V	no	**Vertical dispersion angle 1000 Hz**	180°
closest RAL colour (subject to deviations)	RAL9010	**Net weight product in kg**	1.24

POLAR PLOTS

Data Shown: CM608 (Apart Audio)
Display Parameters: Frequency: 1000Hz (1/24th Octave)
Horizontal
Vertical
Data Shown: CM608 (Apart Audio)
Display Parameters: Frequency: 2000Hz (1/24th Octave)
Data Shown: CM608 (Apart Audio)
Display Parameters: Frequency: 4000Hz (1/24th Octave)
Data Shown: CM608 (Apart Audio)
Display Parameters: Frequency: 8000Hz (1/24th Octave)
Left
Top
Right
Bottom
Front
Back
-10 dB
-20 dB
-30 dB
-40 dB

MORE PICTURES

ACCESSORIES

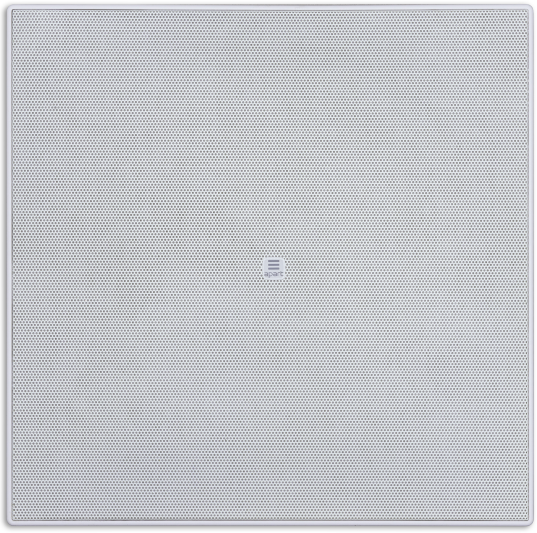

SQGR

Optional square grille for CM Design Series-sold per 12 pcs